

PRODUCT DATA SHEET

Standing: 2021-07-20


LAUDA Proline PBD

Bridge thermostat 230 V; 50/60 Hz

Part Number: L001544

Features

- Bridge thermostatic circulator with latest microprocessor technology technology
- Easily readable green LED display for temperature
- User-friendly menu guidance with simplest 3-key operation
- EasyUse system for simple operation of the whole unit
- SelfCheck Assistant for system diagnosis
- Fully electronic continuous controller with PID action for internal & external control
- PowerAdapt system for the use of the maximum possible amount of heat permitted by the power supply system
- Low-level and adjustable over-temperature protection with acoustic alarm for use with flammable and non-flammable liquids
- LAUDA Varioflex pump (pressure) with 8 selectable levels
- Option for upgrading with up to 2 interfaces (RS 232/485, Profibus, analogue or contact modules, Ethernet-USB module)
- Pump connectors on the side and in the back, installed bypass
- Telescopic rods for bath widths up to 550 mm

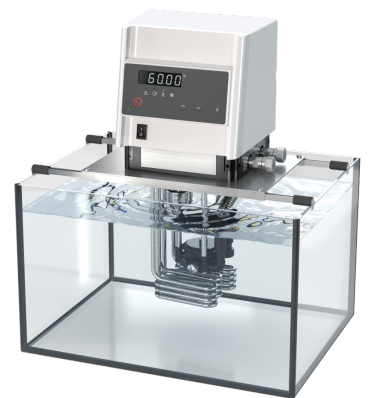

Reserve technical changes



Working temperature min.
30 °C



Working temperature max.
300 °C

PRODUCT DATA SHEET

Standing: 2021-07-20

LAUDA Proline PBD

Bridge thermostat 230 V; 50/60 Hz

Part Number: L001544

Technical Features (according to DIN 12876)

Working temperature range	30 ... 300 °C
Working temperature range with external cooling	20 ... 300 °C
Operating temperature range	-30 ... 300 °C
Ambient temperature range	5 ... 40 °C
Temperature stability	0.01 ± K
Heater power max.	3.6 kW
Power consumption	16 A
Power consumption max.	3.7 kW
Pump Pressure max.	1.1 bar
Pump flow rate pressure max.	32 L/min
Overall dimensions (WxDxH)	320 x 185 x 400 mm
Power supply	230 V; 50/60 Hz
Power plug	Power cord with angled plug (CEE7/7)

Standard accessories

- 4 screw caps, 4 closing plugs
- 2 nipples 13 mm for pump connectors


PRODUCT DATA SHEET

Standing: 2021-07-20

LAUDA Proline PBD

Bridge thermostat 230 V; 50/60 Hz

Part Number: L001544

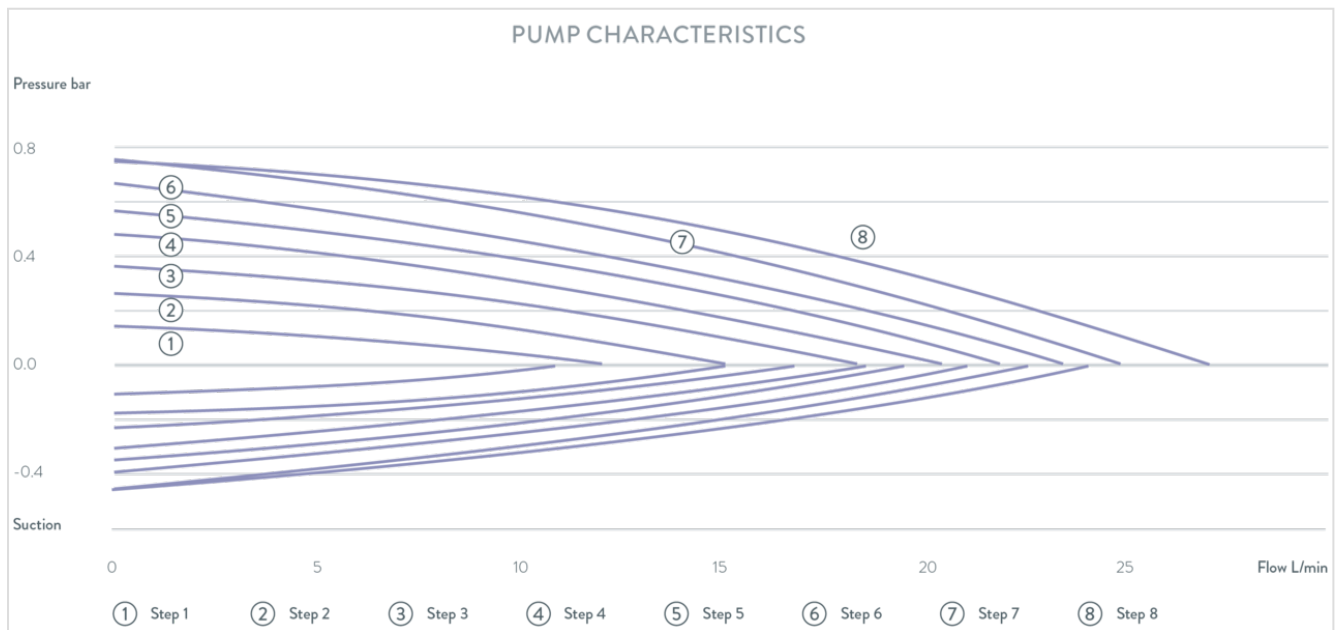

Reserve technical changes