

PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA ECO Silver

Immersion thermostat 230 V; 50/60 Hz

Part Number: L001076

Features

- Immersion thermostat with latest microprocessor technology
- Monochrome graphic LCD display for simultaneous indication of actual and set value
- User friendly menu navigation in plain language
- Easy input via cursor and soft keys. Additional Tmax key for overtemperature protection
- Fully electronic continuous controller with PID action
- Safety class III for operation with flammable and non-flammable liquids. Over-temperature cut-out adjustable via menu
- Vario pump with six adjustable performance levels
- Easy control of the flow rate between internal and external circulation during operation without contact with the bath
- USB interface as standard
- Upgradeable with an interface module (analogue module, contact module, RS 232/485 module, Profibus, Ethernet-USB module)
- Upgradeable with Pt 100/LiBus module for external control and remote control via Command console
- Integrated programmer, 1 programme with max. 20 segments
- With screw clamp for bath vessels with a wall thickness of up to 25 mm and an immersion depth of min. 150 mm



Reserve technical changes



Working temperature min.
20 °C



Working temperature max.
200 °C

PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA ECO Silver

Immersion thermostat 230 V; 50/60 Hz

Part Number: L001076

Technical Features (according to DIN 12876)

Working temperature range	20 ... 200 °C
Ambient temperature range	5 ... 40 °C
Temperature stability	0.01 ± K
Heater power max.	2 kW
Power consumption max.	2.1 kW
Power consumption	10 A
Pump Pressure max.	0.6 bar
Pump flow rate pressure max.	22 L/min
Overall dimensions (WxDxH)	130 x 135 x 325 mm
Power supply	230 V; 50/60 Hz
Power plug	Power cord with angled plug (CEE7/7)

Standard accessories

- 1 screw clamp


PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA ECO Silver

Immersion thermostat 230 V; 50/60 Hz

Part Number: L001076

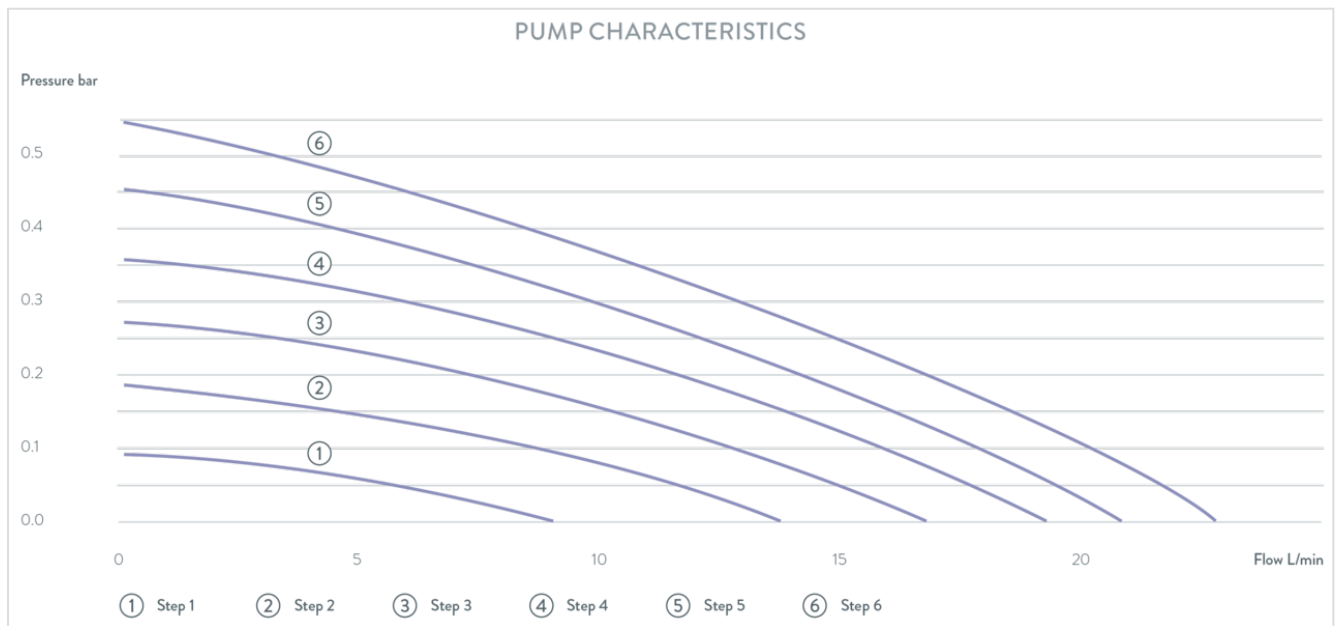

Reserve technical changes