



Scanning Stage SCAN 150 × 150 for Upright Microscopes

Specifications

Travel range	max. 150 × 150 mm
Travel speed	max. 120 mm/s (with 2 mm ball screw pitch) max. 240 mm/s (with 4 mm ball screw pitch)
Repeatability	≤ 0.2 µm ¹
Accuracy	±3 µm ²
Resolution	0.01 µm (smallest step size)
Orthogonality	< 10 arcsec
Motor type	2-phase stepper motor
Limit switches	continuously adjustable optical light barriers
Material / surface	aluminium / anodic coating, black laquered
Weight	approx. 6.2 kg


Order Information

Order No.: 00-24-633-0000 (2 mm)
Order No.: 00-24-634-0000 (4 mm)

Product Features

- ▣ flat, ergonomic design with rounded corners
- ▣ plain surface for easy cleaning
- ▣ exchangeable stage inserts for different kinds of applications
- ▣ continuously adjustable optical light barriers for individual travel range limitation
- ▣ integrated electronic stage identification device ETS for automatic identification of the scanning stage and parametrization of the controller
- ▣ **5 years guarantee**, if the scanning stage is operated in the system with the Märzhäuser TANGO controller

Dimensions

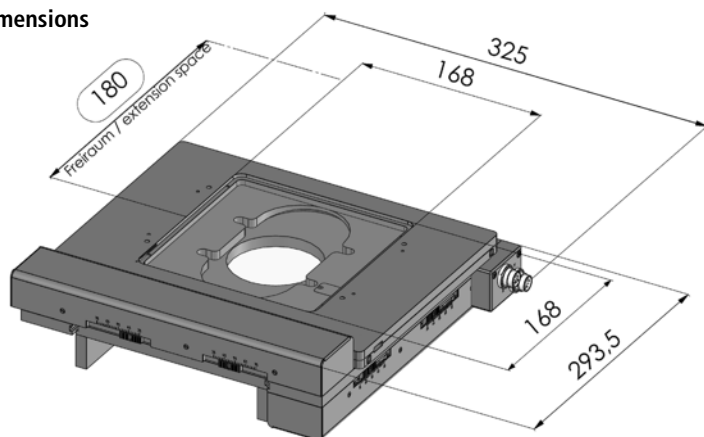

Accessories

Glass plate (included in delivery)
Order No.: 00-24-601-0810

Metal plate
Order No.: 00-24-601-0011

Wafer holder, rotatable, for 5" – 6" wafer
Order No.: 00-29-640-8000

Vacuum wafer holder, rotatable,
for 5" – 6" wafer
Order No.: 00-29-650-8000