

PRODUCT DATA SHEET

Standing: 2021-07-20


LAUDA Proline PV 24

Clear-view thermostat 230 V; 50/60 Hz

Part Number: L001533

Features

- Thermostatic bath/circulator with latest microprocessor technology and installed cooling coil
- Easily readable green LED display for temperature
- User-friendly menu guidance with simplest 3-key operation
- EasyUse system for simple operation of the whole unit
- SelfCheck Assistant for system diagnosis
- Fully electronic continuous controller with PID action for internal & external control
- PowerAdapt system for the use of the maximum possible amount of heat permitted by the power supply system
- Low-level and adjustable over-temperature protection with acoustic alarm for use with flammable and non-flammable liquids
- LAUDA Varioflex pump (pressure) with 8 selectable levels
- Option for upgrading with up to 2 interfaces (RS 232/485, Profibus, analogue or contact modules, Ethernet-USB module)
- Measuring chamber with big windows front and back
- Pump connectors on the side and in the back, installed bypass
- Bath vessel made of stainless steel (insulated, with handles and drain tap)



Reserve technical changes



Working temperature min.
30 °C



Working temperature max.
230 °C

PRODUCT DATA SHEET

Standing: 2021-07-20

LAUDA Proline PV 24

Clear-view thermostat 230 V; 50/60 Hz

Part Number: L001533

Technical Features (according to DIN 12876)

| | |
|---|--------------------------------------|
| Working temperature range | 30 ... 230 °C |
| Working temperature range with external cooling | 20 ... 230 °C |
| Operating temperature range | 0 ... 230 °C |
| Ambient temperature range | 5 ... 40 °C |
| Temperature stability | 0.01 ± K |
| Heater power max. | 3.6 kW |
| Power consumption | 16 A |
| Power consumption max. | 3.7 kW |
| Pump Pressure max. | 0.8 bar |
| Pump flow rate pressure max. | 25 L/min |
| Bath volume min. / max. | 19.0 / 24.0 L |
| Size of bath (W x D x H) | 405 x 135 x 320 mm |
| Overall dimensions (WxDxH) | 740 x 282 x 590 mm |
| Power supply | 230 V; 50/60 Hz |
| Power plug | Power cord with angled plug (CEE7/7) |

Standard accessories

- 4 screw caps, 4 closing plugs
- 2 nipples 13 mm for pump connectors
- 2 nipples for cooling coil

Reserve technical changes


PRODUCT DATA SHEET

Standing: 2021-07-20

LAUDA Proline PV 24

Clear-view thermostat 230 V; 50/60 Hz

Part Number: L001533

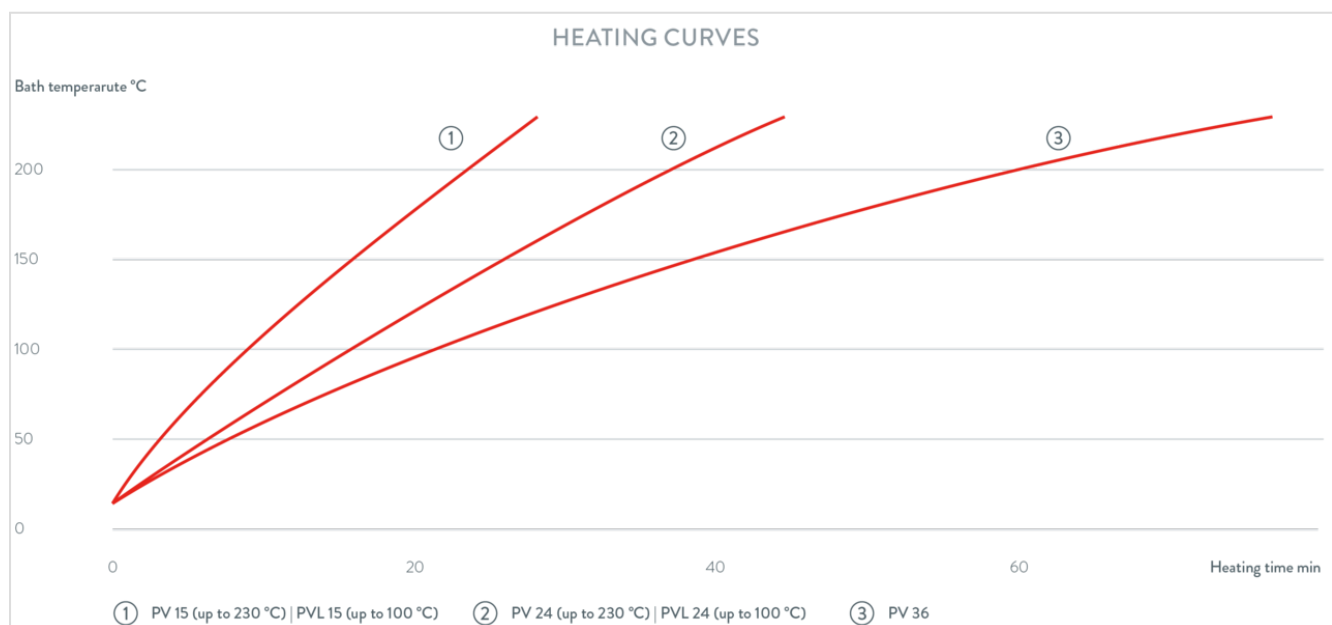

Reserve technical changes

PRODUCT DATA SHEET

Standing: 2021-07-20

LAUDA Proline PV 24

Clear-view thermostat 230 V; 50/60 Hz

Part Number: L001533

