

PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA Alpha A

Immersion thermostat 230 V; 50/60 Hz

Part Number: L000618

Features

- Immersion thermostat with simplest operation
- 1-line LED display for display of actual or set temperature
- User-friendly menu guidance with simplest 3-key operation
- Fully electronic continuous controller
- Low level and overtemperature protection for use with non-flammable liquids
- Acoustic and visual alarm
- Circulating pump with flow reduction
- Usable for baths with max. 30 mm wall thickness and an immersion depth of min. 150 mm
- Optional cooling coil and pump circulation set available



Reserve technical changes



Working temperature min.
25 °C



Working temperature max.
100 °C

PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA Alpha A

Immersion thermostat 230 V; 50/60 Hz

Part Number: L000618

Technical Features (according to DIN 12876)

Working temperature range	25 ... 100 °C
Ambient temperature range	5 ... 40 °C
Temperature stability	0.05 ± K
Heater power max.	1.5 kW
Power consumption max.	1.5 kW
Power consumption	7 A
Pump Pressure max.	0.2 bar
Pump flow rate pressure max.	15 L/min
Bath volume min. / max.	max. 50,0 L
Overall dimensions (WxDxH)	125 x 150 x 300 mm
Power supply	230 V; 50/60 Hz
Power plug	Power cord with angled plug (CEE7/7)

Standard accessories

- 1 screw clamp


PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA Alpha A

Immersion thermostat 230 V; 50/60 Hz

Part Number: L000618

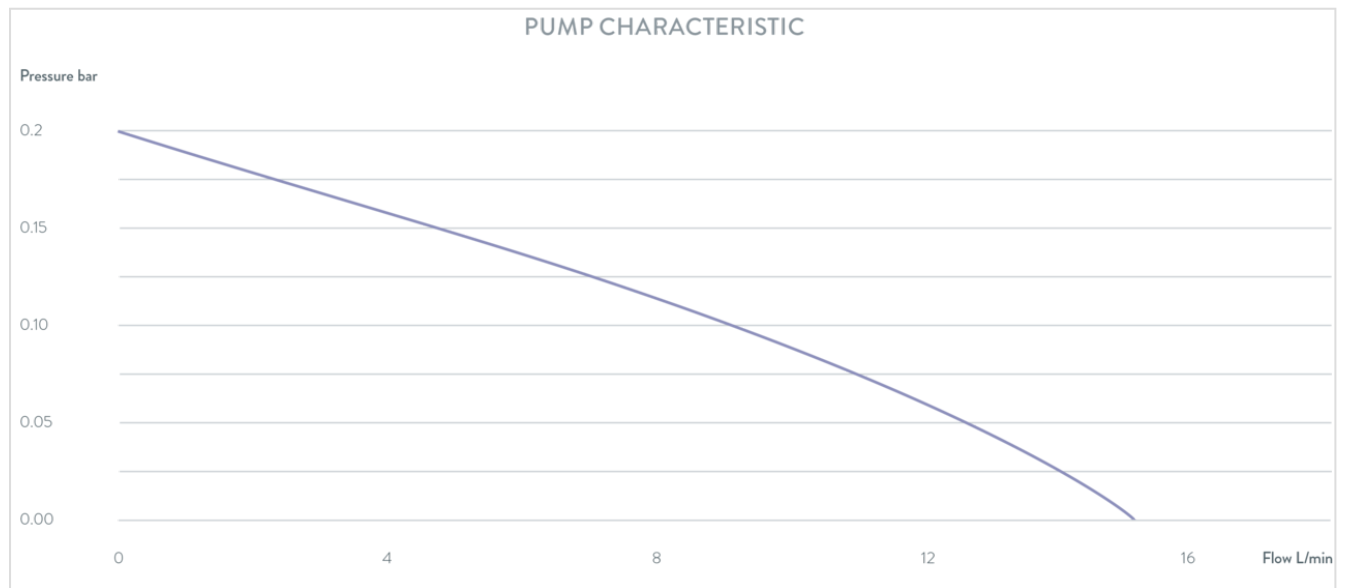

Reserve technical changes