

PRODUCT DATA SHEET

Standing: 2021-06-01

LAUDA PRO RP 250 EC

Cooling heating circulator 230 V; 50 Hz

Part Number: L002495

Features

- Thermostatic circulator with latest microprocessor technology. Integrated cooling system
- Large 5,7" Multi-Touch-Color display
- Operation with multi touch display
- Command console can be detached and used as remote control
- User administration for up to 20 user
- Data in- and export via USB
- Timer und count-down-function
- EasyUse system for simple operation of the whole unit
- Low-level and adjustable over-temperature protection with acoustic alarm for use with flammable and non-flammable liquids
- SelfCheck Assistant for system diagnosis
- USB and Ethernet interface equipped as standard
- Retrofittable for upgrading with interface (RS 232/485, Profibus; EtherCAT; analogue or contact modules)
- Fully electronic continuous controller with PID action for internal & external control
- PowerAdapt system for the use of the maximum possible amount of heat permitted by the power supply system
- Programmer with up to 100 programs, up to 50 segments each
- Tower design with small footprint
- LAUDA Varioflex pump (pressure/suction) with 8 selectable levels, connections rear
- Low filling volume enables rapid changes in temperature
- Bath vessel made of stainless steel (insulated, with overflow and drain tap)
- SmartCool system for energy-saving digital cooling management including compressor on-off control
- Hybrid cooling system: (heat removal complementary with cooling water)
- Utilizes natural refrigerants



Reserve technical changes

PRODUCT DATA SHEET

Standing: 2021-06-01

LAUDA PRO RP 250 EC

Cooling heating circulator 230 V; 50 Hz

Part Number: L002495



Working temperature min.
-50 °C



Working temperature max.
200 °C

Technical Features

Working temperature range	-50 ... 200 °C
Operating temperature range	-50 ... 200 °C
Ambient temperature range	5 ... 40 °C
Temperature stability	0.05 ± K
Heater power max.	2.5 kW
Power consumption max.	3.7 kW
Power consumption	16 A
Pump Pressure max.	0.7 bar
Pump flow rate pressure max.	22 L/min
In / Outlet connection thread (outside)	M16x1
In / Outlet Ø olives	13 mm
Filling volume min.	2.4 L
Filling volume max.	4.4 L
Overall dimensions (WxDxH)	300 x 430 x 675 mm
Refrigerant stage 1	R-290 (GWP 3); 0.140 kg; 0.0 t CO2-eq
Power supply	230 V; 50 Hz
Power plug	Power cord with angled plug (CEE7/7)

Reserve technical changes

PRODUCT DATA SHEET

Standing: 2021-06-01

LAUDA PRO RP 250 EC

Cooling heating circulator 230 V; 50 Hz

Part Number: L002495

Temperature	Pump stage	Heat transfer liquid	Cooling Capacity 50 Hz
20 °C	8	Ethanol	1.5 kW
10 °C	8	Ethanol	1.44 kW
0 °C	8	Ethanol	1.2 kW
-10 °C	8	Ethanol	0.84 kW
-20 °C	4	Ethanol	0.54 kW
-30 °C	4	Ethanol	0.29 kW
-40 °C	4	Ethanol	0.11 kW
-45 °C	4	Ethanol	0.04 kW
-50 °C	2	Ethanol	0.02 kW

Standard accessories

- 2 screw caps, 2 closing plugs
- 2 nipples 13 mm for pump connectors
- 2 nipples 10 mm with screw cap G3/8 for cooling water

Reserve technical changes


PRODUCT DATA SHEET

Standing: 2021-06-01

LAUDA PRO RP 250 EC

Cooling heating circulator 230 V; 50 Hz

Part Number: L002495

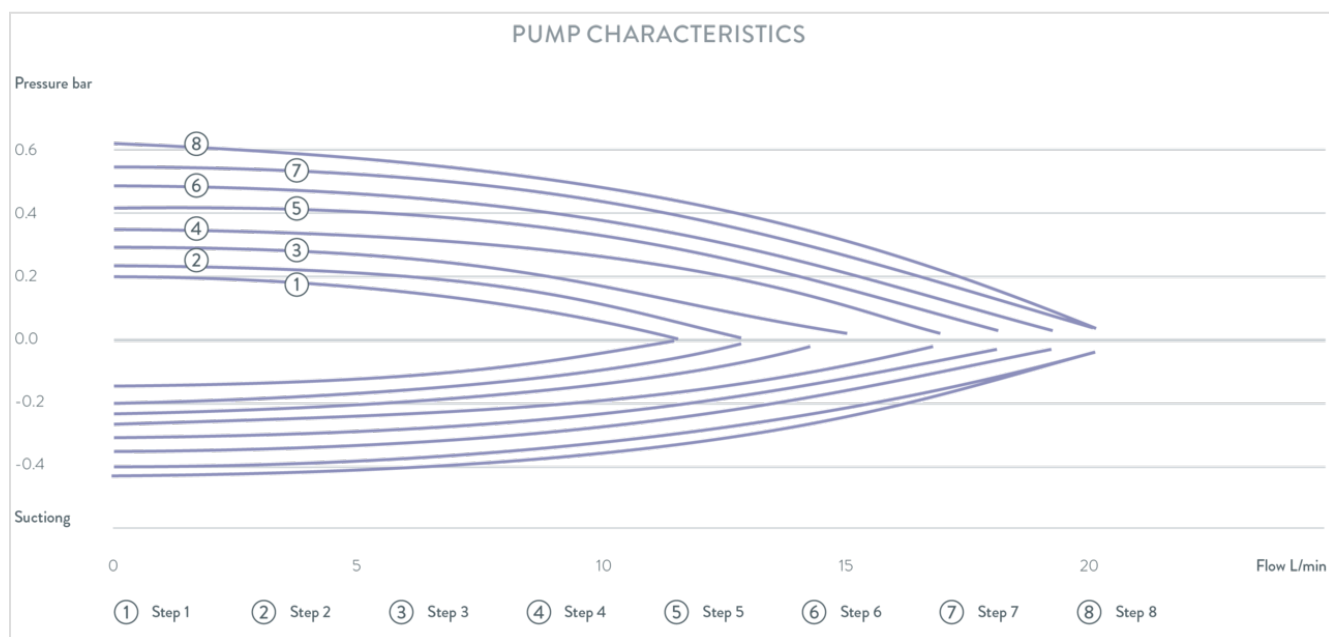

Reserve technical changes